USER GUIDE

Trimble BD930 GNSS Receiver Module

Version 5.11
Revision A
December 2015

Trimble

Corporate Office

Trimble Navigation Limited
Integrated Technologies
510 DeGuigne Drive
Sunnyvale, CA 94085
USA
www.trimble.com/gnss-inertial
Email: GNSSOEMSupport@trimble.com

Legal Notices

© 2006–2015, Trimble Navigation Limited. All rights reserved.
Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. CMR+, EVEREST, Maxwell, and Zephyr are trademarks of Trimble Navigation Limited.
Microsoft, Internet Explorer, Windows, and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
All other trademarks are the property of their respective owners.
Support for Galileo is developed under a license of the European Union and the European Space Agency (BD910/BD920/BD930/BD935/BD970/BD982/BX935/BX982).

Release Notice

This is the December 2015 release (Revision A) of the BD930 GNSS Receiver Module User Guide. It applies to version 5.11 of the receiver firmware.

LIMITED WARRANTY TERMS AND CONDITIONS

Product Limited Warranty

Subject to the following terms and conditions, Trimble Navigation Limited ("Trimble") warrants that for a period of one (1) year from date of purchase unless otherwise specified, this Trimble product (the "Product") will substantially conform to Trimble's publicly available specifications for the Product and that the hardware and any storage media components of the Product will be substantially free from defects in materials and workmanship.

Product Software

Product software, whether built into hardware circuitry as firmware, provided as a standalone computer software product, embedded in flash memory, or stored on magnetic or other media, is licensed solely for use with or as an integral part of the Product and is not sold. If accompanied by a separate end user license agreement ("EULA"), use of any such software will be subject to the terms of such end user license agreement (including any differing limited warranty terms, exclusions, and limitations), which shall control over the terms and conditions set forth in this limited warranty.

Software Fixes

During the limited warranty period you will be entitled to receive such Fixes to the Product software that Trimble releases and makes commercially available and for which it does not charge separately, subject to the procedures for delivery to purchasers of Trimble products generally. If you have purchased the Product from an authorized Trimble dealer rather than from Trimble directly, Trimble may, at its option, forward the software Fix to the Trimble dealer for final distribution to you. Minor Updates, Major Upgrades, new products, or substantially new software releases, as identified by Trimble, are expressly excluded from this update process and limited warranty. Receipt of software Fixes or other enhancements shall not serve to extend the limited warranty period.
For purposes of this warranty the following definitions shall apply: (1) "Fix(es)" means an error correction or other update created to fix a previous software version that does not substantially conform to its Trimble specifications; (2) "Minor Update" occurs when enhancements are made to current features in a software program; and (3) "Major Upgrade" occurs when significant new features are added to software, or when a new product containing new features replaces the further development of a current product line. Trimble reserves the right to determine, in its sole discretion, what constitutes a Fix, Minor Update, or Major Upgrade.

Warranty Remedies

If the Trimble Product fails during the warranty period for reasons covered by this limited warranty and you notify Trimble of such failure during the warranty period, Trimble will repair OR replace the nonconforming Product with new, equivalent to new, or reconditioned parts or Product, OR refund the Product purchase price paid by you, at Trimble's option, upon your return of the Product in accordance with Trimble's product return procedures then in effect.

How to Obtain Warranty Service

To obtain warranty service for the Product, please contact your local Trimble authorized dealer. Alternatively, you may contact Trimble to request warranty service by e-mailing your request to GNSSOEMSupport@trimble.com. Please be prepared to provide:
– your name, address, and telephone numbers
– proof of purchase
– a copy of this Trimble warranty
– a description of the nonconforming Product including the model number
– an explanation of the problem
The customer service representative may need additional information from you depending on the nature of the problem.

Warranty Exclusions or Disclaimer

This Product limited warranty shall only apply in the event and to the extent that (a) the Product is properly and correctly installed, configured, interfaced, maintained, stored, and operated in accordance with Trimble's applicable operator's manual and specifications, and; (b) the Product is not modified or misused. This Product limited warranty shall not apply to, and Trimble shall not be responsible for, defects or performance problems resulting from (i) the combination or utilization of the Product with hardware or software products, information, data, systems, interfaces, or devices not made, supplied, or specified by Trimble; (ii) the operation of the Product under any specification other than, or in addition to, Trimble's standard specifications for its products; (iii) the unauthorized installation, modification, or use of the Product; (iv) damage caused by: accident, lightning or other electrical discharge, fresh or salt water immersion or spray (outside of Product specifications); or exposure to environmental conditions for which the Product is not intended; (v) normal wear and tear on consumable parts (e.g., batteries); or (vi) cosmetic damage. Trimble does not warrant or guarantee the results obtained through the use of the Product, or that software components will operate error free.
NOTICE REGARDING PRODUCTS EQUIPPED WITH TECHNOLOGY CAPABLE OF TRACKING SATELLITE SIGNALS FROM SATELLITE BASED AUGMENTATION SYSTEMS (SBAS) (WAAS/EGNOS, AND MSAS), OMNISTAR, GPS, MODERNIZED GPS OR GLONASS SATELLITES, OR FROM IALA BEACON SOURCES: *TRIMBLE IS NOT RESPONSIBLE FOR THE OPERATION OR FAILURE OF OPERATION OF ANY SATELLITE BASED POSITIONING SYSTEM OR THE AVAILABILITY OF ANY SATELLITE BASED POSITIONING SIGNALS.*
THE FOREGOING LIMITED WARRANTY TERMS STATE TRIMBLE'S ENTIRE LIABILITY, AND YOUR EXCLUSIVE REMEDIES, RELATING TO THE TRIMBLE PRODUCT. EXCEPT AS OTHERWISE EXPRESSLY PROVIDED HEREIN, THE PRODUCT, AND ACCOMPANYING DOCUMENTATION AND MATERIALS ARE PROVIDED "AS-IS" AND WITHOUT EXPRESS OR IMPLIED WARRANTY OF ANY KIND, BY EITHER TRIMBLE OR ANYONE WHO HAS BEEN INVOLVED IN ITS CREATION, PRODUCTION, INSTALLATION, OR DISTRIBUTION, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT. THE STATED EXPRESS WARRANTIES ARE IN LIEU OF ALL OBLIGATIONS OR LIABILITIES ON THE PART OF TRIMBLE ARISING OUT OF, OR IN CONNECTION WITH, ANY PRODUCT. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW LIMITATIONS ON DURATION OR THE EXCLUSION OF AN IMPLIED WARRANTY, THE ABOVE LIMITATION MAY NOT APPLY OR FULLY APPLY TO YOU.

Limitation of Liability

TRIMBLE'S ENTIRE LIABILITY UNDER ANY PROVISION HEREIN SHALL BE LIMITED TO THE AMOUNT PAID BY YOU FOR THE PRODUCT. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL TRIMBLE OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGE WHATSOEVER UNDER ANY CIRCUMSTANCE OR LEGAL THEORY RELATING IN ANYWAY TO THE PRODUCTS, SOFTWARE AND ACCOMPANYING DOCUMENTATION AND MATERIALS, (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, LOSS OF DATA, OR ANY OTHER PECUNIARY LOSS), REGARDLESS OF WHETHER TRIMBLE HAS BEEN ADVISED OF THE POSSIBILITY OF ANY SUCH LOSS AND REGARDLESS OF THE COURSE OF DEALING WHICH DEVELOPS OR HAS DEVELOPED BETWEEN YOU AND TRIMBLE. BECAUSE SOME STATES AND JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY OR FULLY APPLY TO YOU.

PLEASE NOTE: THE ABOVE TRIMBLE LIMITED WARRANTY PROVISIONS WILL NOT APPLY TO PRODUCTS PURCHASED IN THOSE JURISDICTIONS (E.G., MEMBER STATES OF THE EUROPEAN ECONOMIC AREA) IN WHICH PRODUCT WARRANTIES ARE THE RESPONSIBILITY OF THE LOCAL TRIMBLE AUTHORIZED DEALER FROM WHOM THE PRODUCTS ARE ACQUIRED. IN SUCH A CASE, PLEASE CONTACT YOUR LOCAL TRIMBLE AUTHORIZED DEALER FOR APPLICABLE WARRANTY INFORMATION.

Official Language

THE OFFICIAL LANGUAGE OF THESE TERMS AND CONDITIONS IS ENGLISH. IN THE EVENT OF A CONFLICT BETWEEN ENGLISH AND OTHER LANGUAGE VERSIONS, THE ENGLISH LANGUAGE SHALL CONTROL.

COCOM limits

This notice applies to the BD910, BD920, BD920-W, BD920-W3G, BD930, BD930-UHF, BD935-INS, BD960, BD970, BD982, BX960, BX960-2, and BX982 receivers.
The U.S. Department of Commerce requires that all exportable GPS products contain performance limitations so that they cannot be used in a manner that could threaten the security of the United States. The following limitations are implemented on this product:
– Immediate access to satellite measurements and navigation results is disabled when the receiver velocity is computed to be greater than 1,000 knots, or its altitude is computed to be above 18,000 meters. The receiver GPS subsystem resets until the COCOM situation clears. As a result, all logging and stream configurations stop until the GPS subsystem is cleared.

Restriction of Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS)

Trimble products in this guide comply in all material respects with DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS Directive) and Amendment 2005/618/EC filed under C(2005) 3143, with exemptions for lead in solder pursuant to Paragraph 7 of the Annex to the RoHS Directive applied.

Waste Electrical and Electronic Equipment (WEEE)



For product recycling instructions and more information, please go to www.trimble.com/Corporate/Environmental_Compliance.aspx.
Recycling in Europe: To recycle Trimble WEEE (Waste Electrical and Electronic Equipment, products that run on electrical power.), Call +31 497 53 24 30, and ask for the "WEEE Associate". Or, mail a request for recycling instructions to:
Trimble Europe BV
c/o Menlo Worldwide Logistics
Meerheide 45
5521 DZ Eersel, NL

Contents

Contents 4

1 Introduction 6

About the BD930 GNSS receiver 7
BD930 features 8
Default settings 10
Technical support 11

2 Specifications 12

Positioning specifications 13
Performance specifications 14
Physical and electrical characteristics 15
Environmental specifications 15
Communication specifications 16

3 Mechanical Drawings 17

BD930 module mechanical drawing 18
BD930 evaluation I/O board 19
BD930 PCB assembly schematics 21

4 Electrical System Integration 23

80-pin header connector pinouts 24
1PPS and ASCII time tag 31
ASCII time tag 32
Power input 33
Antenna power output 33
LED control lines 34
Power switch and reset 35
Event 36
Serial port 37
USB 37
Ethernet 41
Recommended electrical specifications for the antenna 46

5 Installation 47

Unpacking and inspecting the shipment 48
Installation guidelines 48
Interface board evaluation kit 50
Routing and connecting the antenna cable 51
LED functionality and operation 52

6 Troubleshooting Receiver Issues 53
Glossary 55

CHAPTER 1

Introduction

- About the BD930 GNSS receiver
- BD930 features
- Default settings
- Technical support

This manual describes how to set up, configure, and use the Trimble® BD930 GNSS receiver module. The receiver uses advanced navigation architecture to achieve real-time centimeter accuracies with minimal latencies.

Even if you have used other GNSS or GPS products before, Trimble recommends that you spend some time reading this manual to learn about the special features of this product. If you are not familiar with GNSS or GPS, visit the Trimble website (www.trimble.com).

About the BD930 GNSS receiver

The Trimble BD930 GNSS receiver supports both triple frequency from the GPS and GLONASS constellations plus dual frequency from BeiDou and Galileo. As the numbers of satellites in the constellations grow the BD930 is ready to take advantage of the additional signals. This delivers the quickest and most reliable RTK initializations for 1–2 centimeter positioning. For applications that do not require centimeter accuracy the BD930 contains an advanced Kalman filter PVT engine that delivers high accuracy GNSS, DGNSS positions in the most challenging environments such as urban canyons.

Different configurations of the module are available. These include everything from an autonomous GPS L1 unit all the way to a four constellation triple frequency RTK unit.

With the latest Trimble-precise Maxwell™ 6 technology, the BD930 provides assurance of long-term future-proofing and trouble-free operation. Moving the industry forward, the Trimble BD930 redefines high-performance positioning:

- On-board multipath mitigation
- Proven low-elevation tracking technology

The receiver can be configured as an autonomous base station (sometimes called a reference station) or as a rover receiver (sometimes called a mobile receiver). Streamed outputs from the receiver provide detailed information, including the time, position, heading, quality assurance (figure of merit) numbers, and the number of tracked satellites. The receiver also outputs a one pulse-per-second (1 PPS) strobe signal which lets remote devices precisely synchronize time.

Designed for reliable operation in all environments, the receiver provides a positioning interface to an office computer, external processing device, or control system.

BD930 features

The receiver has the following features:

- Position antenna based a on 220-channel Trimble Maxwell™ 6 chip:
  - GPS: L1 C/A, L2E, L2C, L5
  - BeiDou: B1, B2
  - GLONASS: L1 and L2 C/A, L3 CDMA
  - Galileo: E1, E5A, E5B, E5AltBOC
  - QZSS: L1 C/A, L1 SAIF, L2C, L5
  - SBAS: L1 C/A, L5
- Advanced Trimble Maxwell 6 Custom Survey GNSS Technology
- High precision multiple correlator for GNSS pseudorange measurements
- Unfiltered, unsmoothed pseudorange measurement data for low noise, low multipath error, low time domain correlation and high dynamic response
- Very low noise GNSS carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
- Proven Trimble low elevation tracking technology
- 1 USB 2.0 device port
- 1 LAN Ethernet port:
  - Supports links to 10BaseT/100BaseT auto-negotiate networks
  - All functions are performed through a single IP address simultaneously—including web interface access and raw data streaming
- Network protocols supported:
  - HTTP (web interface)
  - NTP Server
  - NMEA, GSOF, CMR over TCP/IP or UDP
  - NTripCaster, NTripServer, NTripClient
  - mDNS/uPnP Service discovery
  - Dynamic DNS
  - eMail alerts
  - Network link to Google Earth
  - Support for external modems through PPP
- 4 x RS-232 ports (baud rates up to 115,200)

- Up to 20 Hz raw measurement and position outputs
- Correction inputs/outputs: CMR, CMR+™, sCMRx, RTCM 2.1, 2.2, 2.3, 2.4, 3.X, 3.2.

  Note:

  - *The functionality to input or output any of these corrections depends on the installed options*.
  - *Different manufacturers may have established different packet structures for their correction messages. Thus, the BD9xx receiver may not receive corrections from another manufacturer's receiver, and another manufacturer's receiver may not be able to receive corrections from the BD9xx receiver*.
- Navigation outputs:
  - ASCII: NMEA-0183: GBS; GGA; GLL; GNS; GRS; GSA; GST; GSV; HDT; LLQ; AVR; GDP; DTM; BPQ; GGK; PJK; PJT; VGK; VHD; RMC; ROT; VTG; ZDA.
  - Binary: Trimble GSOF.
- Control software: HTML Web browser (Google Chrome (recommended), Internet Explorer®, Mozilla Firefox, Apple Safari, Opera)
- 1 pulse-per-second (1PPS) output
- Event Marker Input support
- Supports Fault Detection and Exclusion (FDE), Receiver Autonomous Integrity Monitoring (RAIM)
- 10 MHz External Frequency Input

Note – *Galileo support is developed under a license of the European Union and the European Space Agency.*

Note – *There is no public GLONASS L3 CDMA ICD. The current capability in the receivers is based on publicly available information. As such, Trimble cannot guarantee that these receivers will be fully compatible*

Default settings

All settings are stored in application files. The default application file, Default.cfg, is stored permanently in the receiver, and contains the factory default settings. Whenever the receiver is reset to its factory defaults, the current settings (stored in the current application file, Current.cfg) are reset to the values in the default application file.

These settings are defined in the default application file.

Function	Settings	Factory default
SV Enable	-	All SVs enabled
General Controls	Elevation mask	10°
	PDOP mask	99
	RTK positioning mode	Low Latency
	Motion	Kinematic
Ports	Baud rate	38,400
	Format	8-None-1
	Flow control	None
Input Setup	Station	Any
NMEA/ASCII (all supported messages)		All ports Off
Streamed Output		All types Off
		Offset=00
RT17/Binary		All ports Off
Reference Position	Latitude	0°
	Longitude	0°
	Altitude	0.00 m HAE
Antenna	Type	Unknown
	Height (true vertical)	0.00 m
	Measurement method	Antenna Phase Center
1PPS		Disabled

If a factory reset is performed, the above defaults are applied to the receiver. The receiver also returns to a DHCP mode, and security is enabled (with a default login of **admin** and the password of **password**). To perform a factory reset:

- From the web interface, select *Receiver Configuration* / *Reset* and then clear the *Clear All Receiver Settings* option.
- Send the Command 58h with a 03h reset value.

Technical support

If you have a problem and cannot find the information you need in the product documentation, send an email to GNSSOEMSupport@trimble.com.

Documentation, firmware, and software updates are available at: www.intech.trimble.com/support/oem_gnss/receivers/trimble.

CHAPTER 2

Specifications

- Positioning specifications
- Performance specifications
- Physical and electrical characteristics
- Environmental specifications
- Communication specifications

This chapter details the specifications for the receiver.

Specifications are subject to change without notice.

Positioning specifications

Note *– The following specifications are provided at 1 sigma level when using a Trimble Zephyr 2 antenna. These specifications may be affected by atmospheric conditions, signal multipath, and satellite geometry. Initialization reliability is continuously monitored to ensure highest quality.*

Feature	Specification
Initialization time	Typically <10 seconds
Initialization accuracy	>99.9%

Mode	Accuracy	Latency (at max. output rate)	Maximum Rate
Single Baseline RTK (<30 km)	0.008 m + 1 ppm horizontal	<30 ms	20 Hz
	0.015 m + 1 ppm vertical		
DGPS	0.25 m + 1 ppm horizontal	<20 ms	20 Hz
	0.5 m + 1 ppm vertical		
SBAS[1]	0.5 m horizontal	<20 ms	20 Hz
	0.85 m vertical		

[1]GPS only and depends on SBAS system performance. FAA WAAS accuracy specifications are <5m 3DRMS.

Performance specifications

Note *– The Time to First Fix specifications are typical observed values. A cold start is when the receiver has no previous satellite (ephemerides/almanac) or position (approximate position or time) information. A warm start is when the ephemerides and last used position is known.*

Feature	Specification	
Time to First Fix (TFF)	Cold Start	<45 seconds
	Warm Start	<30 seconds
	Signal Re-acquisition	<2 seconds
Velocity Accuracy[1]	Horizontal	0.007 m/sec
	Vertical	0.020 m/sec
Maximum Operating Limits[2]	Velocity	515 m/sec
	Altitude	18,000 m
Acceleration	11 g	

[1] 1 sigma level when using a Trimble Zephyr 2 antenna. These specifications may be affected by atmospheric conditions, signal multipath, and satellite geometry. Initialization reliability is continuously monitored to ensure highest quality.

[2] As required by the US Department of Commerce to comply with export licensing restrictions.

Physical and electrical characteristics

Feature	Specification
Dimensions (L x W x H)	51 mm x 41 mm x 7 mm
Power	3.3 V DC +5%/-3%
	Typical 1.7 W (L1/L2 GPS + L1/L2 GLONASS) Typical 2.2 W (L1/L2/L5 GPS/GLONASS/BeiDou/Galileo)
Weight	30 grams
Connectors	I/O: 80-pin Narrow Pitch Panasonic (AXK780327G) Socket Panasonic AXK880125WG required mating connector (Rated for 50 cycles)
	Antenna: MMCX receptacle (Rated for 500 cycles)
Antenna LNA Power Output	Output voltage: 3.3 to 5 V DC
	Current rating: 200 mA Maximum current: 400 mA
Minimum required LNA gain	31 dB ***Note*** *– This receiver is designed to operate with the Zephyr Model 2 antenna which has a gain of 50 dB. Higher-gain antennas have not been tested.*

Environmental specifications

Feature	Specification
Temperature	Operating: -40°C to 80°C (-40°F to 176°F)
	Storage: -55°C to 85°C (-67°F to 185°F)
Vibration	MIL810F, tailored Random 6.2 gRMS operating Random 8 gRMS survival
Mechanical shock	MIL810D +/- 40 g operating +/- 75 g survival

Feature	Specification
Operating humidity	5% to 95% R.H. non-condensing, at +60°C (140°F)

Communication specifications

Feature	Specification	
Communications	1 LAN port	• Supports links to 10BaseT/100BaseT networks. • All functions are performed through a single IP address simultaneously – including web interface access and data streaming.
	3 x RS-232 ports	Baud rates up to 115,200
	1 USB 2.0 port	
Receiver position update rate	1 Hz, 2 Hz, 5 Hz, 10 Hz, and 20 Hz positioning	
Correction data input	CMR, CMR+™, sCMRx, RTCM 2.0–2.4, RTCM 3.X, 3.2	
Correction data output	CMR, CMR+, sCMRx, RTCM 2.0 DGPS (select RTCM 2.1), RTCM 2.1–2.4, RTCM 3.X, 3.2	
Data outputs	1PPS, NMEA, Binary GSOF, ASCII Time Tags	

CHAPTER 3


Mechanical Drawings


- BD930 module mechanical drawing
- BD930 evaluation I/O board
- BD930 PCB assembly schematics

The drawings in this section show the dimensions of the receiver. Refer to these drawings if you need to build mounting brackets and housings for the receiver.

BD930 module mechanical drawing

Note *– Dimensions are shown in millimeters (mm). Dimensions shown in brackets are in inches.*

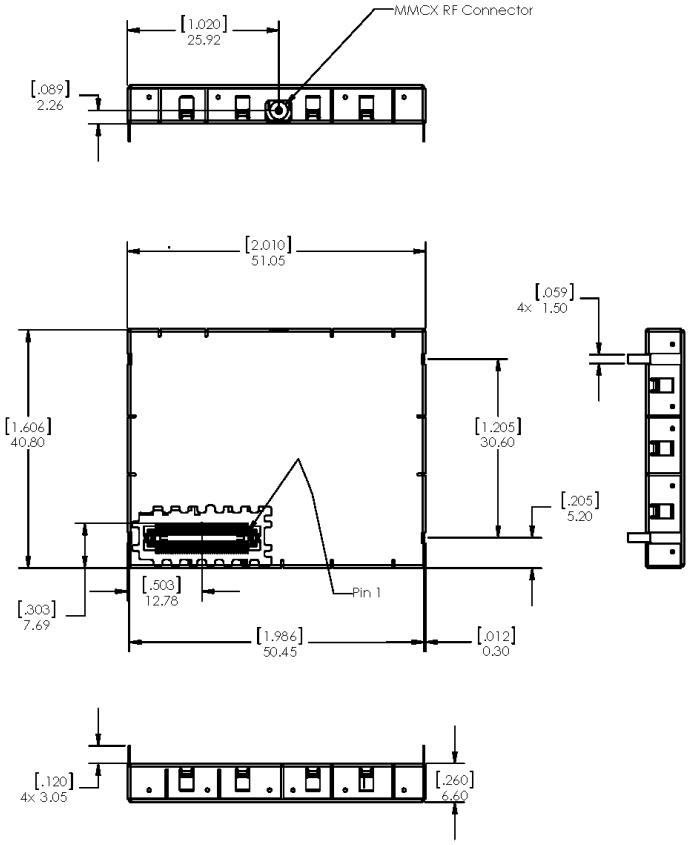


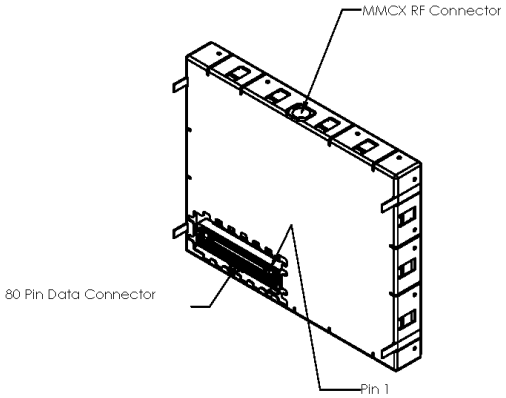

Note: Pin 3 sits next to pin 1 and is opposite pin 4. So the pins following pin 1 (in the same column) are 3,5,7 …. And following pin #2 are 2,4,6,8…..

BD930 evaluation I/O board

Current or prospective customers can obtain schematic drawings of the evaluation I/O board by contacting GNSSOEMSupport@trimble.com.

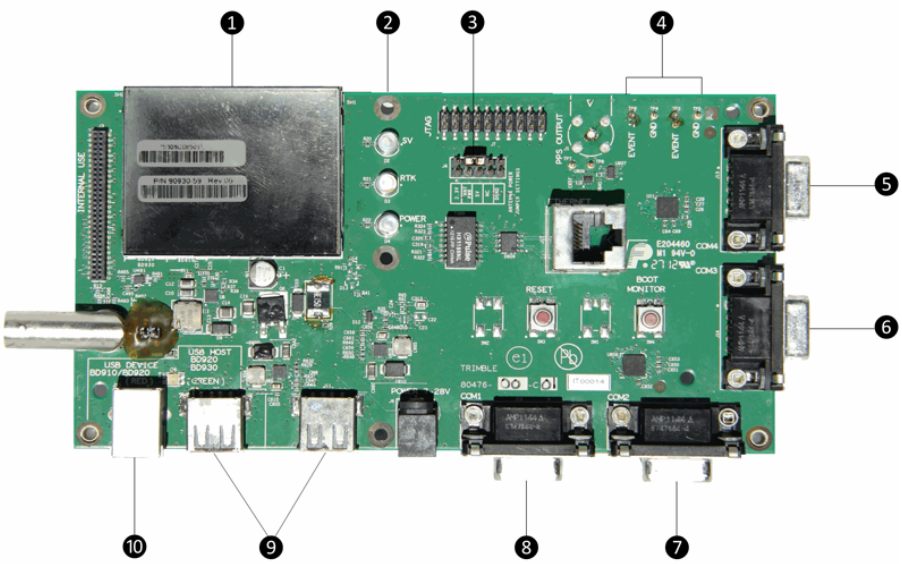


1	GNSS Receiver module	5	Serial Port 4	8	Serial Port 1
2	Receiver status LEDs	6	Serial Port 3	9	USB Type A
3	Antenna Power Select	7	Serial Port 2	10	USB Type B
4	Event Pins				

Antenna jumper setting


The development board has a unique configuration to control the voltage sent to the antenna. The board has two preset voltages that the developer can use in addition to the option of setting their own voltage to the antenna.

The figure below shows the pre-loaded configuration:

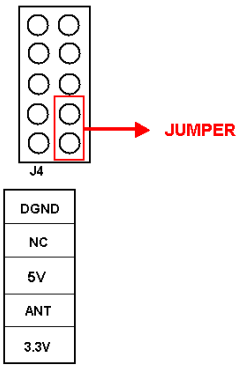


In this mode, the antenna voltage is 3.3V.

To configure antenna voltage to 5V (the other preset voltage), connect the jumper as shown:

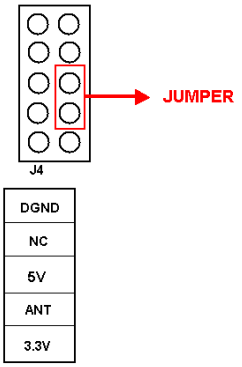


The final option is to manually set the antenna voltage by attaching a voltage across the two pins shown:




BD930 PCB assembly schematics

PCB layout recommendations

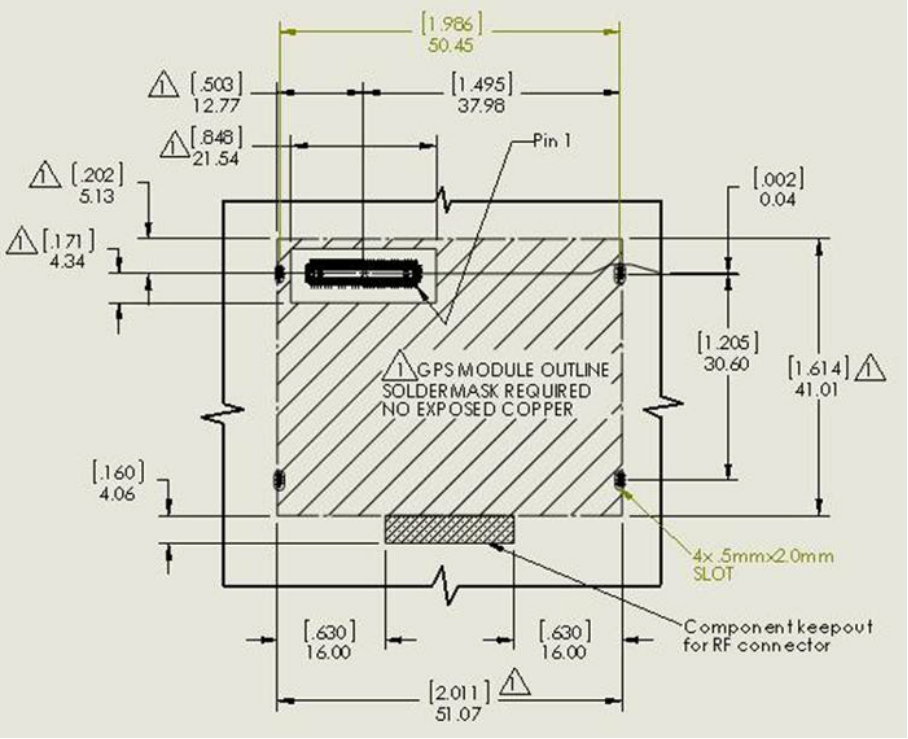

PCB assembly recommendations

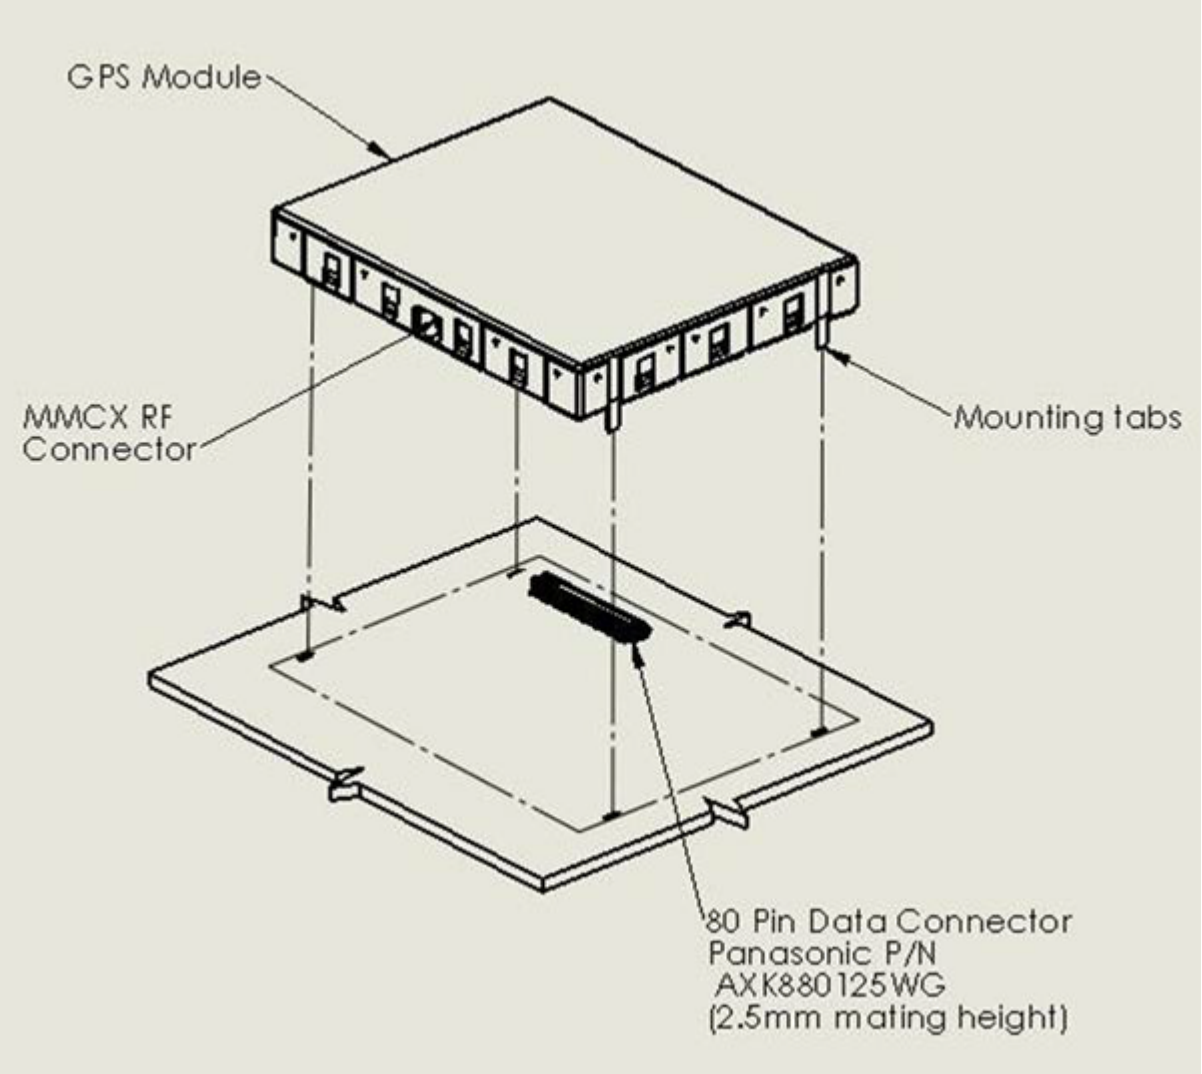

Trimble recommends that integrators design their PCB so that when the mounting tabs are soldered this will ground the shield of the BD930 to their PCB. However, this is not required for functional bench-level evaluation since the primary ground paths are through the 80-pin connector.

CHAPTER 4

Electrical System Integration

- 80-pin header connector pinouts
- 1PPS and ASCII time tag
- Power input
- ASCII time tag
- Antenna power output
- LED control lines
- Power switch and reset
- Event
- Serial port
- USB
- Ethernet
- Recommended electrical specifications for the antenna

80-pin header connector pinouts

The 80-pin Narrow Pitch Panasonic Socket has the following pinouts.

Pin	Signal name	Description	Integration notes
1	VCC Input DC Card power	VCC Input DC Card power (3.3V only)	VCC Input DC Card power (3.3V only)
2	VCC Input DC Card power	VCC Input DC Card power (3.3V only)	VCC Input DC Card power (3.3V only)
3	ANTENNA_ POWER	VCC Input DC Card power (3.3V to 5V)	This feeds antenna power. Voltage and current requirement based on antenna voltage used. Ripple Voltage should be 100mV Vpp or better. This can be shorted directly to 3.3V used to supply power to the unit if the antenna can handle 3.3V. It can handle a maximum current of 150 mA.
4	Power LED	POWER Indicator. High when unit is on, low when off. This is similar to all BD9xx products, except for the requirement for an external resistor. This allows user to use this as a control line.	When used to drive an LED, a series resistor with a typical value of 300 Ohms is required. This pin supplies a maximum current of 4mA. For LEDs with Vf above 2.7 or current excess of 4mA, an external buffer is required.
5	RESET_IN	RESET_IN - ground to reset	Drive low to reset the unit. Otherwise, leave unconnected.
6	RTK LED	RTK LED. Flashes when an RTK correction is present. This is similar to all BD9xx products, except for the requirement for an external resistor.	When used to drive an LED, a series resistor with a typical value of 300 Ohms is required. This pin supplies a maximum current of 4mA. For LEDs with Vf above 2.7 or current excess of 4mA, an external buffer is required.
7	GND	Ground Digital Ground	Ground Digital Ground
8	Satellite	Satellite LED. Rapid flash indicates <5 satellites. Slow flash indicates >5	When used to drive an LED, a series resistor with a typical value of 300 Ohms is required. This pin supplies a maximum current of 4mA.

Pin	Signal name	Description	Integration notes
		satellites.	For LEDs with Vf above 2.7 or current excess of 4mA, an external buffer is required.
9	USB_OTG_ID	USB ID pin, tells the receiver when it should be in USB host or device mode.	Drive low when the receiver is the host. Drive high through a maximum of 1kOhm pull up when the receiver is the device.
10	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
11	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
12	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
13	BOOT_ MONITOR*	Boot to Monitor pin. This prevents the unit from executing the application firmware.	Drive the pin low at boot up to force the receiver into monitor mode. Do not connect for normal operation.
14	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
15	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
16	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
17	GND	Ground Digital Ground	Ground Digital Ground
18	COM2_Rx	COM 2 Receive Data - TTL Level	Connect COM2_RX to a transceiver if RS-232 level is required. ***Note** – This pin is connected to two physical pins.*
19	COM2_CTS	COM 2 Clear to Send - TTL Level	Connect COM2_CTS to a transceiver if RS-232 level is required. ***Note** – This pin is connected to two physical pins.*

Pin	Signal name	Description	Integration notes
20	COM2_Tx	COM 2 Transmit Data - TTL Level	Connect COM2_TX to a transceiver if RS-232 level is required.
21	COM2_RTS	COM 2 Request to Send	Request to Send for COM 2 connect to a transceiver if RS-232 level is required.
22	COM1_Tx	COM 1 Transmit Data – TTL Level	Connect COM1_TX to a transceiver if RS-232 level is required.
23	GND	Ground Digital Ground	Ground Digital Ground
24	COM1_Rx	COM 1 Receive Data – TTL Level	Connect COM1_RX to a transceiver if RS-232 level is required.
25	USB D (-)	USB D (-) Bi-directional USB interface data (-)	Data negative signal of OTG USB port. OTG role (device or host) is determined by OTG_ID (pin 9). Device Mode only. If VCC is supplied, USB detects VBUS.
26	GND	Ground Digital Ground	Ground Digital Ground
27	USB D (+)	USB D (+) Bi-directional USB interface data (+)	Data positive signal of OTG USB port. OTG role (device or host) is determined by OTG_ID (pin 9). Device Mode only. If VCC is supplied, USB detects VBUS.
28	GND	Ground Digital Ground	Ground Digital Ground
29	GND	Ground Digital Ground	Ground Digital Ground
30	PPS (Pulse per Second)	Pulse per second	This is 3.3V TTL level, 4mA max drive capability. To drive 50 Ohm load to ground, an external buffer is required. PPS Jitter spec is 20nS.
31	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
32	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
33	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.

Pin	Signal name	Description	Integration notes
34	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
35	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
36	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
37	Event1	Event1 - Input	Event1 (must be 3.3V TTL level)
38	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
39	Event2	Event2 - Input	Event2 (must be 3.3V TTL level)
40	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
41	GND	Ground Digital Ground	Ground Digital Ground
42	GND	Ground Digital Ground	Ground Digital Ground
43	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
44	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
45	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
46	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
47	GND	Ground Digital Ground	Ground Digital Ground
48	NO_CONNECT	RESERVED	For proper operation of the receiver, do not

Pin	Signal name	Description	Integration notes
			connect anything to this pin. Reserved for internal use.
49	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
50	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
51	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
52	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
53	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
54	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
55	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
56	COM4_CTS	COM 4 Clear to Send - TTL Level	Connect COM4_CTS to a transceiver if RS-232 level is required.
57	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
58	COM4_RTS	COM 4 Request to Send - TTL Level	Request to Send for COM 4 connect to a transceiver if RS-232 level is required.
59	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
60	COM3_Rx	COM 3 Receive Data –	Connect COM3_RX to a transceiver if RS-232

Pin	Signal name	Description	Integration notes
		TTL Level	level is required.
61	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
62	COM3_Tx	COM 3 Transmit Data – TTL Level	Connect COM3_TX to a transceiver if RS-232 level is required.
63	COM4_Rx	COM 4 Receive Data – TTL Level	Connect COM4_RX to a transceiver if RS-232 level is required.
64	COM4_Tx	COM 4 Transmit Data – TTL Level	Connect COM4_TX to a transceiver if RS-232 level is required.
65	GND	Ground Digital Ground	Ground Digital Ground
66	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
67	GND	Ground Digital Ground	Ground Digital Ground
68	NO_CONNECT	RESERVED	For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
69	ETH_RD+	Ethernet Receive line plus. Differential pair.	Connect to Magnetics RD+
70	GND	Ground Digital Ground	Ground Digital Ground
71	ETH_RD-	Ethernet Receive line minus. Differential pair.	Connect to Magnetics RD-
72	GND	Ground Digital Ground	Ground Digital Ground
73	GND	Ground Digital Ground	Ground Digital Ground
74	I/O_READY	I/O status ready	This pin indicates that the signal lines can now be drive. For proper operation of the receiver, do not connect anything to this pin. Reserved for internal use.
75	ETH_TD+	Ethernet Transmit line plus. Differential pair.	Connect to Magnetics TD+


Pin	Signal name	Description	Integration notes
76	EN_EXTREF	Enable External 10MHz Source	3.3V TTL level. Selects between using internal and external 10 MHz source for RF time base. Setting this signal to low uses internal 10 MHz TCXO. Setting signal high sets external reference mode. It is critical for system stability that this signal does not toggle during run-time. Doing so will destabilize PLLs and cause undesirable effects.
77	ETH_TD-	Ethernet Transmit line minus. Differential pair.	Connect to Magnetics TD-
78	EXTREF_IN	External 10MHz Input	10MHz reference input when EN_EXTREF (pin 76) is high. Reference input must be CMOS minimum 2Vpp. Signal is internally AC coupled. **RF tracking performance can be negatively affected by poor external reference**. Pin can be grounded if unused.
79	GND	Ground Digital Ground	Ground Digital Ground
80	DO NOT CONNECT	Reserved	DO NOT CONNECT

1PPS and ASCII time tag

The receiver can output a 1 pulse-per-second (1PPS) time strobe and an associated time tag message. The time tags are output on a user-selected port.

The leading edge of the pulse coincides with the beginning of each UTC second. The pulse is driven between nominal levels of 0.0 V and 3.3 V (see below). The leading edge is positive (rising from 0 V to 3.3 V). The receiver PPS out is a 3.3 V TTL level with a maximum source/sink current of 4 mA. If the system requires a voltage level or current source/sink level beyond these levels, you must have an external buffer. This line has ESD protection.

The illustration below shows the time tag relation to 1PPS wave form:

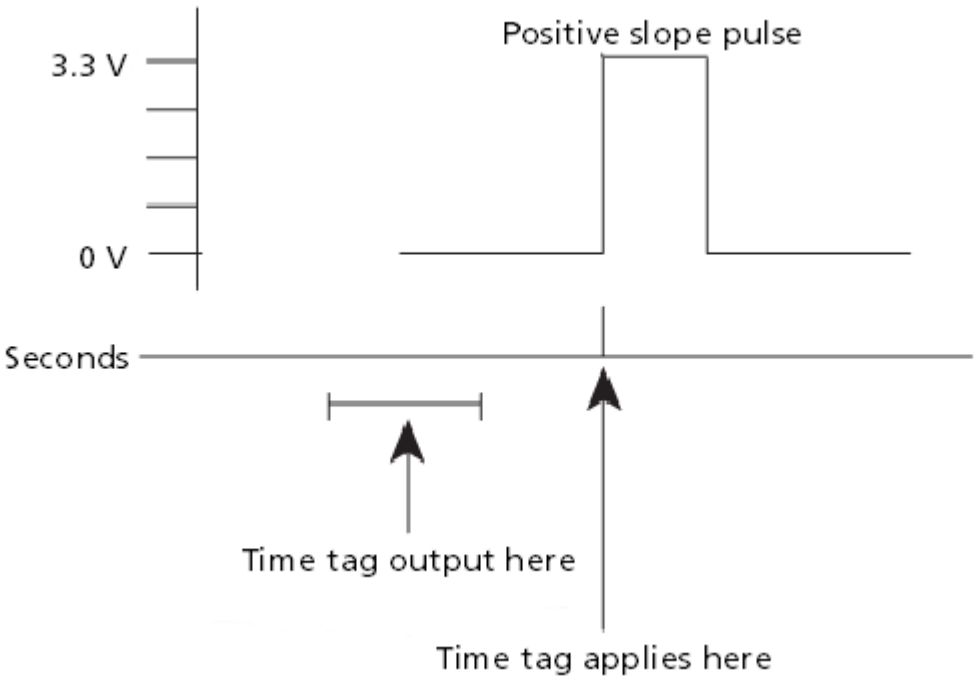

The pulse is about 8 microseconds wide, with rise and fall times of about 100 ns. Resolution is approximately 40 ns, where the 40 ns resolution means that the PPS shifting mechanism in the receiver can align the PPS to UTC/GPS time only within +/- 20 ns, but the following external factor limits accuracy to approximately ±1 microsecond:

- Antenna cable length

  Each meter of cable adds a delay of about 2 ns to satellite signals, and a corresponding delay in the 1PPS pulse.

ASCII time tag

Each time tag is output about 0.5 second before the corresponding pulse. Time tags are in ASCII format on a user-selected serial port. The format of a time tag is:

UTC yy.mm.dd hh:mm:ss ab

Where:

- UTC is fixed text.
- *yy.mm.dd* is the year, month, and date.
- *hh:mm:ss* is the hour (on a 24-hour clock), minute, and second. The time is in UTC, not GPS.
- *a* is an integer number representing the position-fix type:

  1 = time solution only

  2 = 1D position and time solution

  3 = currently unused

  4 = 2D position and time solution

  5 = 3D position and time solution
- *b* is the number of GNSS satellites being tracked. If the receiver is tracking 9 or more satellites, b will always be displayed as 9.
- Each time tag is terminated by a *carriage return*, *line feed* sequence. A typical printout looks like:

  UTC 02.12.21 20:21:16 56

  UTC 02.12.21 20:21:17 56

  UTC 02.12.21 20:21:18 56

Note – *If the receiver is not tracking satellites, the time tag is based on the receiver clock. In this case, a and b are represented by "??". The time readings from the receiver clock are less accurate than time readings determined from the satellite signals.*


Power input

Item	Description
Power requirement	The unit, excluding the antenna, operates at 3.3 V +5%/-3%. The 3.3 V should be able to supply 1.8 A of surge current. The typical power consumption based on band usage is: • L1/L2 GPS + GLONASS = 1.7 W • L1/L2/L5 GPS + GLONASS + BeiDou + Galileo = 2.2 W

Antenna power output

Item	Description
Power output specification	The antenna DC power is supplied directly from Pin 3 on the Multipin Interface Connector J5. The antenna output is rated to a maximum voltage of 10 V DC and can source a maximum of 400 mAmps. Power is a separate pin and it can be powered externally or shorted to the input power if the antenna can handle 3.3 V. This pin can handle a maximum supply of 100 mA at 5 V.
Short-circuit protection	The unit does not have over-current / short circuit protection related to antenna bias. Short circuits may cause damage to the antenna port bias filtering components if the sourcing supply is not current limited to less than 400 mA.

LED control lines

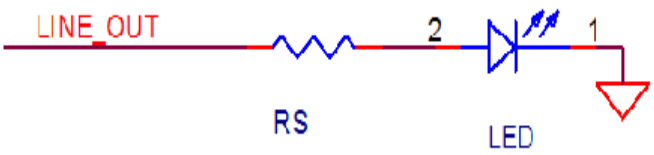Item	Description
Driving LEDs	The outputs are 3.3 V TTL level with a maximum source/sink current of 4 mA. An external series resistor must be used to limit the current. The value of the series resistor in Ohms is determined by: (3.3-Vf)/(If) > Rs > (3.3 V - Vf)/(.004) Rs = Series resistor If = LED forward current, max typical If of the LED should be less than 3 mA Vf = LED forward voltage, max typical Vf of the LED should be less than 2.7 V Most LEDs can be driven directly as shown in the circuit below:  LEDs that do not meet If and Vf specification must be driven with a buffer to ensure proper voltage level and source/sink current.
Power LED	This active-high line indicates that the unit is powered on.
Satellite LED	This active-high line indicates that the unit has acquired satellites. A rapid flash indicates that the unit has less than 5 satellites acquired while a slow flash indicates greater than 5 satellites acquired. This line will stay on if the unit is in monitor mode.
RTK Correction	A slow flash indicates that the unit is receiving corrections. This will also flash when the unit is in monitor mode.


Power switch and reset

Item	Description
Reset switch	Driving Reset_IN_L, Pin 12, low will cause the unit to reset. The unit will remain reset at least 140 mS after the Reset_In_L is deasserted. The unit remains powered while in reset.
Power switch	Driving Boot_Monitor low while the unit is starting will cause the receiver to go into the boot monitor. This keeps the application from loading. For normal operation, keep Boot_Monitor floating.

Event

Item	Description
Event 1	Pin 37 is dedicated as an Event_In pin. This is a TTL only input; it is not buffered or protected for any inputs outside of 0 V to 3.3 V. It does have ESD protection. If the system requires event to handle a voltage outside this range, the system integrator must condition the signal prior to connecting to the unit.
Event 2	Pin 39 is dedicated as an Event_In pin. This is a TTL only input; it is not buffered or protected for any inputs outside of 0 V to 3.3 V. It does have ESD protection but if the system requires event to handle a voltage outside this range, the system integrator must condition the signal prior to connecting the unit.

Trimble recommends adding a Schmitt trigger and ESD protection to the Event_In pin. This prevents any 'ringing' on the input from causing multiple and incorrect events to be recognized.

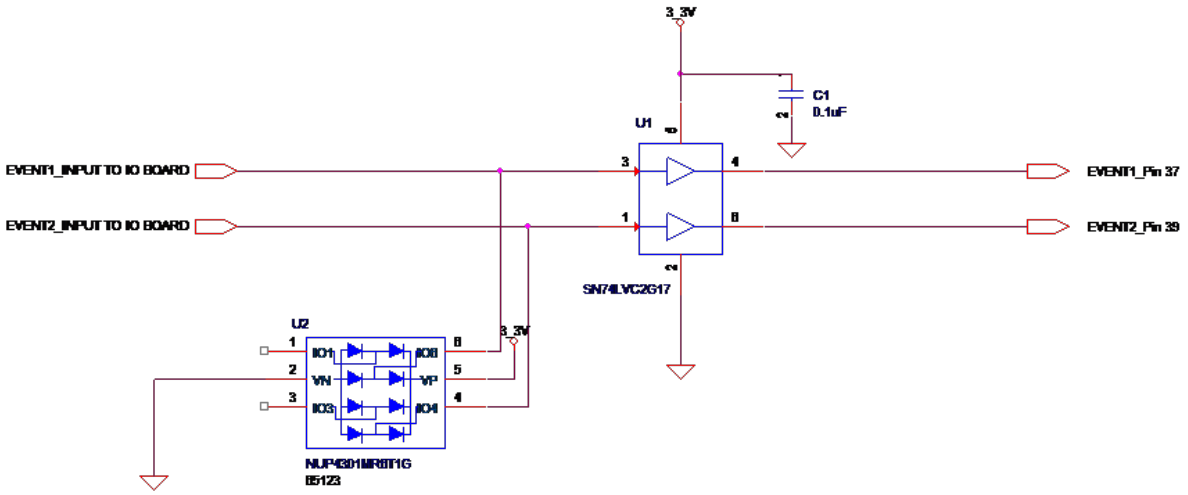

U1 is Texas instrument: SN74LVC2G17

U2 is ON Semiconductor: NUP4301MR6T1G

SN74LVC2G17 is also suitable for 5 V systems. It accepts inputs up to 5.5 V even when using 3.3 V VCC. Take care to make sure that I/O does not exceed 3.3 V.

For more information, go to www.trimble.com/OEM_ReceiverHelp/V5.11/default.html#AppNote_EventInput.html.

Serial port

Item	Description
COM 1 TTL level no flow control	COM 1 is at 0 to 3.3 V TTL. If the integrator needs this port to be at RS-232 level, a proper transceiver powered by the same 3.3 V that powers the receiver needs to be added. For development using the I/O board, this COM port is already connected to an RS-232 transceiver. This is labeled Port 1 on the I/O board. All TTL-COM will support either 3.3 V CMOS or TTL levels.
COM 2 TTL level with flow control	COM 2 is at 0 to 3.3 V TTL. This port has RTS/CTS to support hardware flow control. If the integrator needs this port to be at RS-232 level, a proper transceiver powered by the same 3.3 V that powers the receiver needs to be added. For development using the I/O board, this COM port is already connected to an RS-232 transceiver. This is labeled Port 2 on the I/O board. All TTL-COM will support either 3.3 V CMOS or TTL levels.
COM 3 TTL level no flow control	COM 3 is at 0 to 3.3 V TTL. If the integrator needs this port to be at RS-232 level, a proper transceiver powered by the same 3.3 V that powers the receiver needs to be added. For development using the I/O board, this COM port is already connected to an RS-232 transceiver. This is labeled Port 3 on the I/O board. All TTL-COM will support either 3.3 V CMOS or TTL levels
COM 4 TTL level with flow control	COM 4 is at 0 to 3.3 V TTL. This port has RTS/CTS to support hardware flow control. If the integrator needs this port to be at RS-232 level, a proper transceiver powered by the same 3.3 V that powers the receiver needs to be added. For development using the I/O board, this COM port is already connected to an RS-232 transceiver. This is labeled Port 4 on the I/O board. All TTL-COM will support either 3.3 V CMOS or TTL levels.


USB

The CPU of the BD930 has two integrated USB PHYs. One PHY supports USB 2.0 OTG in high, full, and low-speed modes. The second PHY supports host-only configuration at low speed and full speed. If the OTG port is set to device mode, the BD930 will behave like an external storage device to a PC. If the OTG port is in host mode, external memory can be connected to the BD930 to provide additional storage space.

The port has ESD protection; however a USB 2.0-compliant common mode choke located near the connector should be added to ensure EMI compliance.

The USB_OTG_ID pin determines if the BD930 will act as a host (a digital ‘1’) or device (a digital ‘0’). It is important that if a pull-up resistor is used to drive the pin high, it must be limited to 1 KOhm.

USB OTG reference design

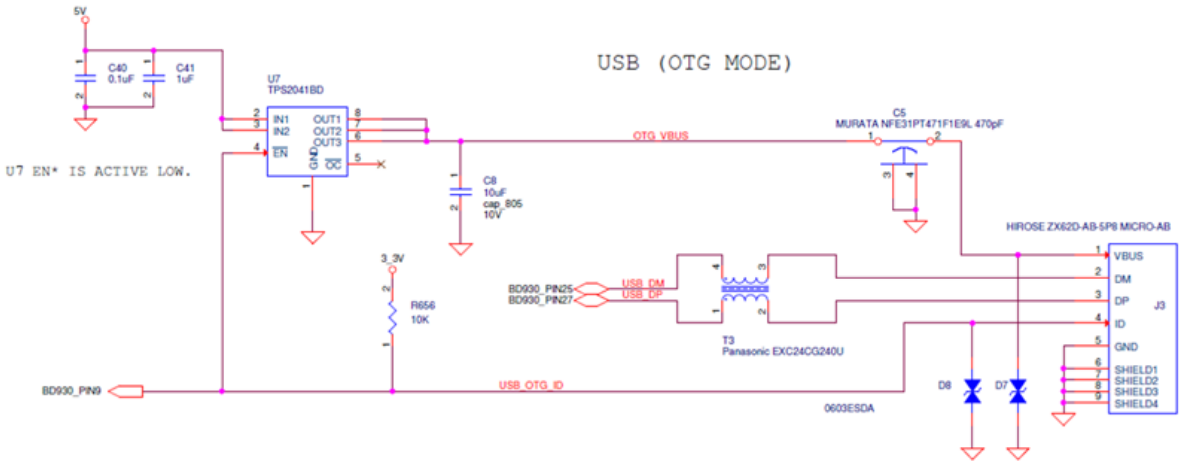

To be OTG compliant, the connector must be MICRO AB. An OTG-compliant cable has both A and B ends. When the B side of the cable is inserted, the ID pin is not connected (floating) and the BD930 will enter device mode through a pull-up resistor. The integrator should limit the pull-up resistor to 1 KOhm. The A side cable connects the ID pin to ground, which enables the BD930 to act as a USB host.

To reduce EMI, place a USB 2.0 compliant common mode choke on the data lines. The choke should be located near the USB MICRO AB connector to ensure best EMI performance. In addition, Trimble recommends using an L-C-L type EMI filter for the output power.


For product robustness and protection, place ESD protection diodes on both USB_VBUS and USB_ OTG_ID lines. The BD930 has no internal ESD protection on the USB data lines.

To ensure best USB high-speed performance, careful consideration of PCB routing and placement practices must be taken:

- Place components so the trace length is minimized.
- Do not have stubs on data lines more than 0.200”.
- Route data lines differentially with as much parallelism as possible.
- Data lines should be nearly the same length.
- Data lines must be controlled to 90 Ohms differential impedance, and 45 Ohms single ended impedance.
- Route over continuous reference plane (either ground or power).


For more detailed information, refer to the Intel High Speed USB Platform Design Guidelines.

USB host only reference design

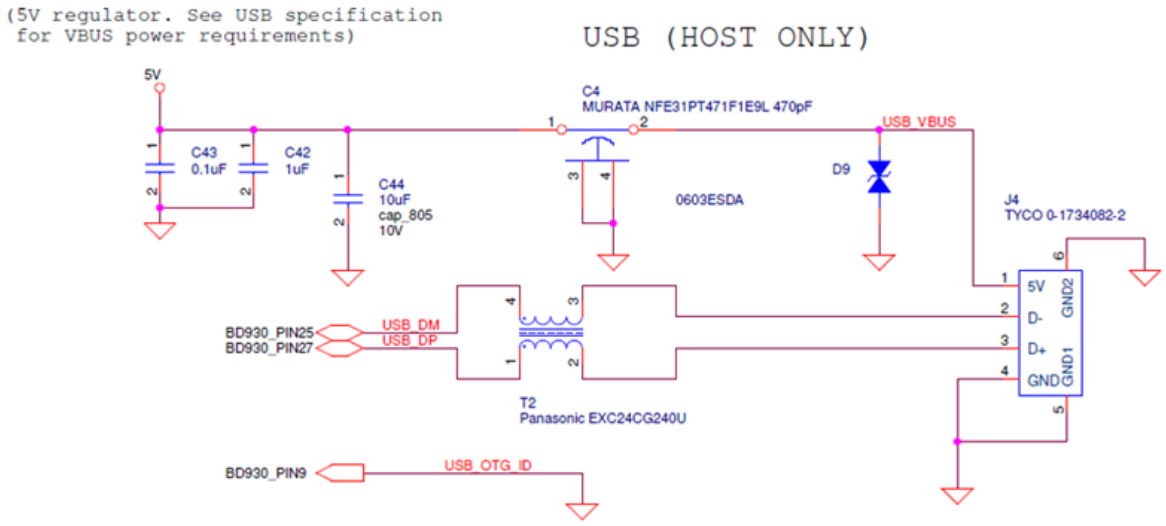


For USB host-only support, a type-A connector is required. Since dynamic role switching is not supported, the ID pin should be grounded on the BD930. See the OTG reference design section above for additional recommendations for EMI, ESD protection, and layout considerations.

USB device only reference design

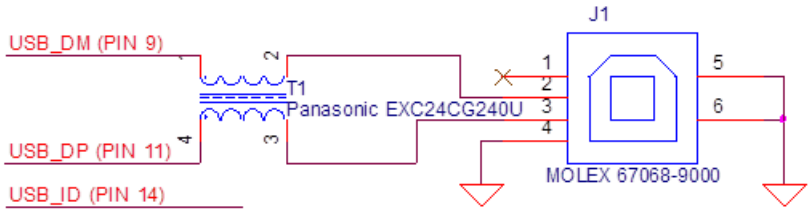

For device only operation, the USB_OTG_ID pin is left floating. The integrator is required to pull USB_OTG_ID high usually through a pull-up resistor. The pull-up resistor is limited at 1 KOhm and should be powered by the output from the I/O ready pin (pin 74). In this mode of operation, the USB_DEVICE_VBUS is used only by the BD930 to detect the presence of the host power connected. See the OTG reference design section above for additional recommendations for EMI, ESD protection, and layout considerations.

USB VBUS

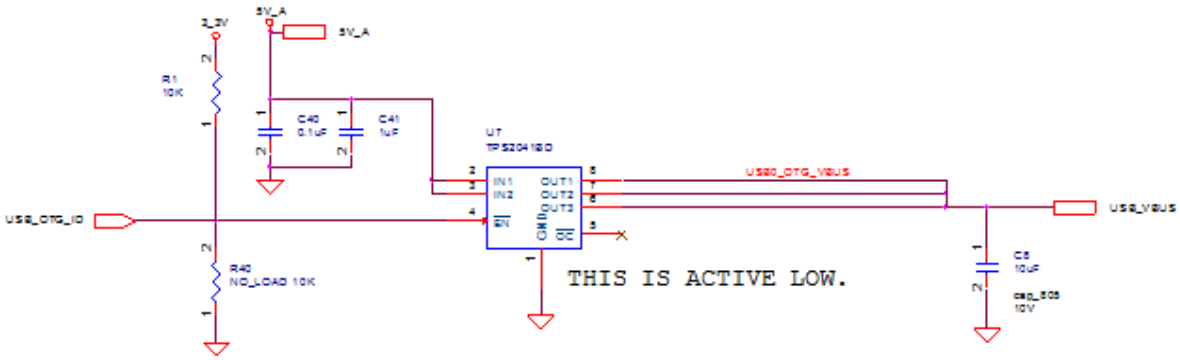

The integrator needs to control VBUS. When the BD930 is in device mode, VBUS is provided by the host device and the integrator should not provide any power. In host mode, the integrator has to be able to output +5 V, 500 mA to pin 1 of the device. This can be implemented using Texas Instrument's TPS2041BD.

Ethernet

The receiver contains the Ethernet MAC and PHY, but requires external magnetics. The PHY layer is based on the Micrel KSZ8041NLI it is set to default to 100 Mbps, full duplex with auto-negotiation enabled.

Since the Ethernet functionality will typically increase the receiver power consumption by approximately 10%, the receiver shuts down the Ethernet controller if no Ethernet devices are connected within 2 minutes.

Isolation transformer selection

Parameters	Value	Test condition
Turns Ratio	1CT:1CT	
Open-circuit inductance (min.)	350 uH	100 mV, 100 kHz, 8 mA
Leakage inductance (max.)	0.4 uH	1 MHz (min.)
DC resistance (max.)	0.9 Ohms	
Insertion loss (max.)	1.0 dB	0 to 65 MHz
HiPot (min.	1500 Vrms	


Ethernet reference design

The Ethernet interface can be implemented using a single part or using discrete components. For more information, see:


- Ethernet design using RJ-45 with integrated magnetics, page 42
- Ethernet design using discrete components, page 43

Ethernet design using RJ-45 with integrated magnetics

The Ethernet interface can be implemented with a single part by using an integrated part like TE Connectivity's 6605767-1 which has magnetics, common mode choke, termination and transient voltage suppression fully integrated in one part.

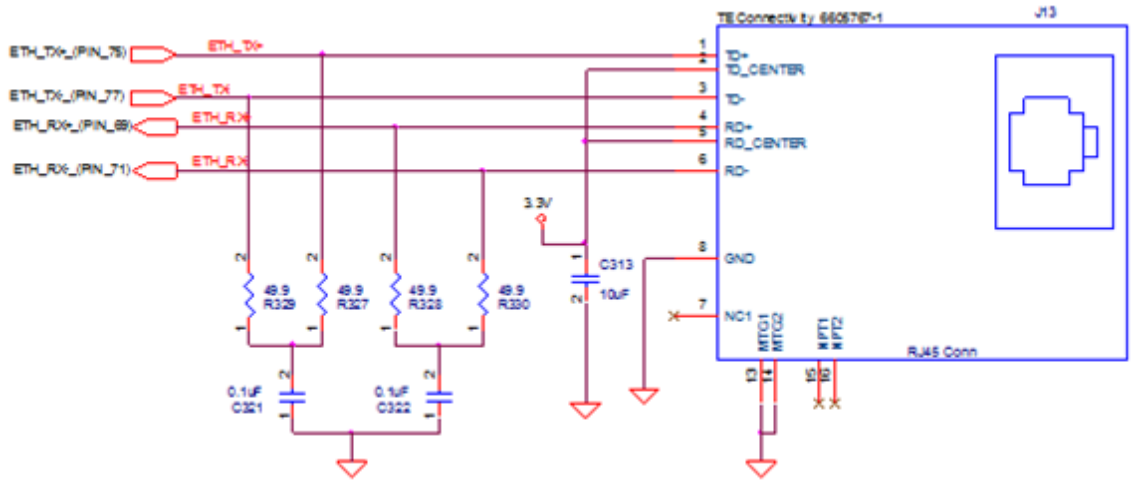

RJ-45 drawing

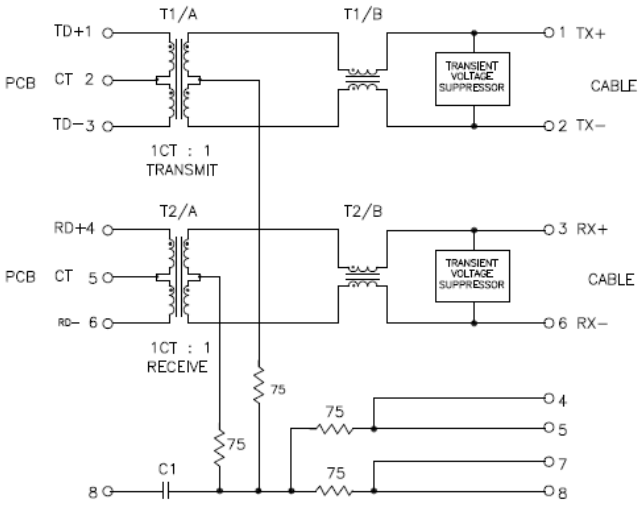


JX10-0006NL schematic

Electrical characteristics

Parameter	Specifications	
Insertion loss	100 kHz	1-125 MHz
	-1.2 dB max.	-0.2–0.002*f^1.4 db max.
Return loss (Z out = 100 Ohm +/- 15%)	0.1–30 MHz: 30–60 MHz: 60–80 MHz:	-16 dB min. -10+20*LOG$_{10}$ (f/60 MHz dB min.) -10 dB min.
Inductance (OCL) (Media side -40°C + 85°C)	350 uH min.	Measured at 100 kHz, 100 mVRMS and with 8 mA DC bias)
Crosstalk, adjacent channels	1 MHz	10-100 MHz
	-50 dB min.	-50+17*LOG$_{10}$(f/10) dB min.
Common mode rejection radio	2 MHz	30–200 MHz
	-50 dB min.	-15+20*LOG$_{10}$ (f/200) dB min.
DC resistance 1/2 winding	0.6 Ohms max.	
DC resistance imbalance	+/- 0.065 Ohms max. (center tap symmetry)	
input - output isolation	1500 Vrms min. at 60 seconds	

Ethernet design using discrete components

For maximum flexibility, a system integrator may choose to implement the Ethernet using discrete parts. The design below shows an example of such a design. It includes the Ethernet magnetics, termination of unused lines as well as surge protection. The magnetics used is a Pulse Engineering HX1188. Surge protection is provided by a Semtech SLVU2.8-4. In order to meet electrical isolation requirements, it is recommended to use capacitors with a greater than 2 kV breakdown voltage.

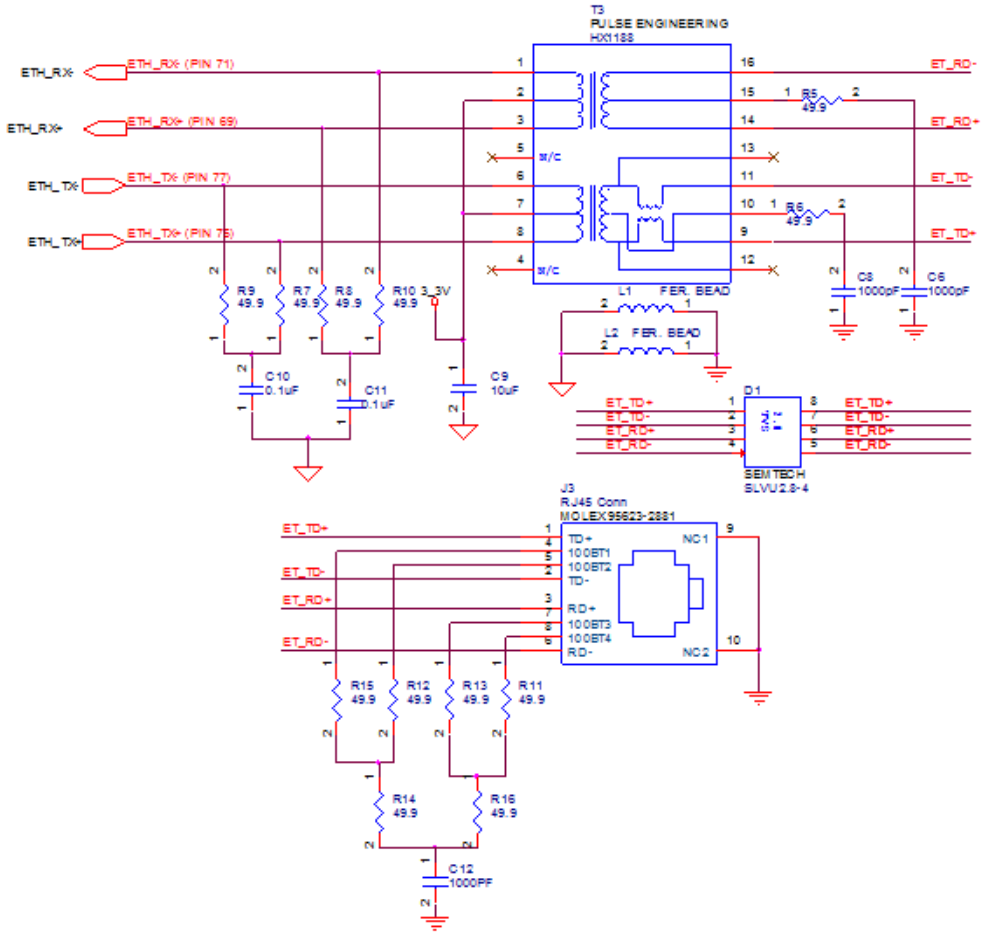


Ethernet schematic

Part Reference	Value
C4–C6	1000pF 2 kV
C3	10 uF X5R 6.3 V
D1	SEMTECH SLVU2.8–4
J1	RJ45 Conn
L1, L2	Ferrite Bead
R1–R11	49.9 0402 1%
T1	Pulse engineering HX1188


Ethernet routing

The distance from the BD930 connector, the Ethernet connector and the magnetics should be less than 2 inches. The distance from the RJ-45 and the magnetics should be minimized to prevent conducted emissions issues. In this design, the chassis ground and signal ground is separated to improve radiated emissions. The integrator may choose to combine the ground. The application note from the IC vendor is provided below for more detailed routing guidelines.

The sample routing below shows a two-layer stack up, with single side board placement. The routing shown below makes sure that the differential pairs are routed over solid planes.

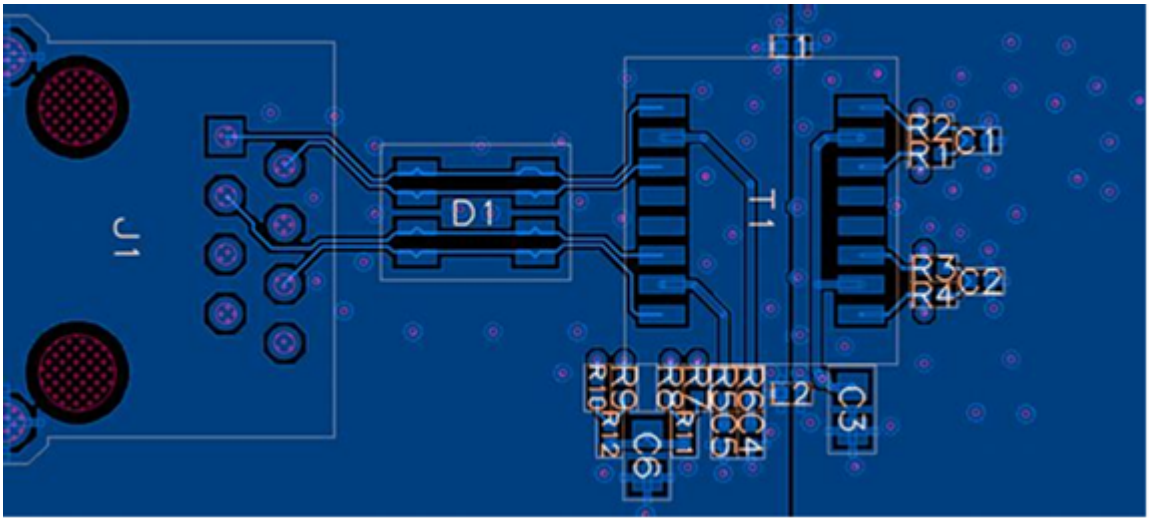

Top view

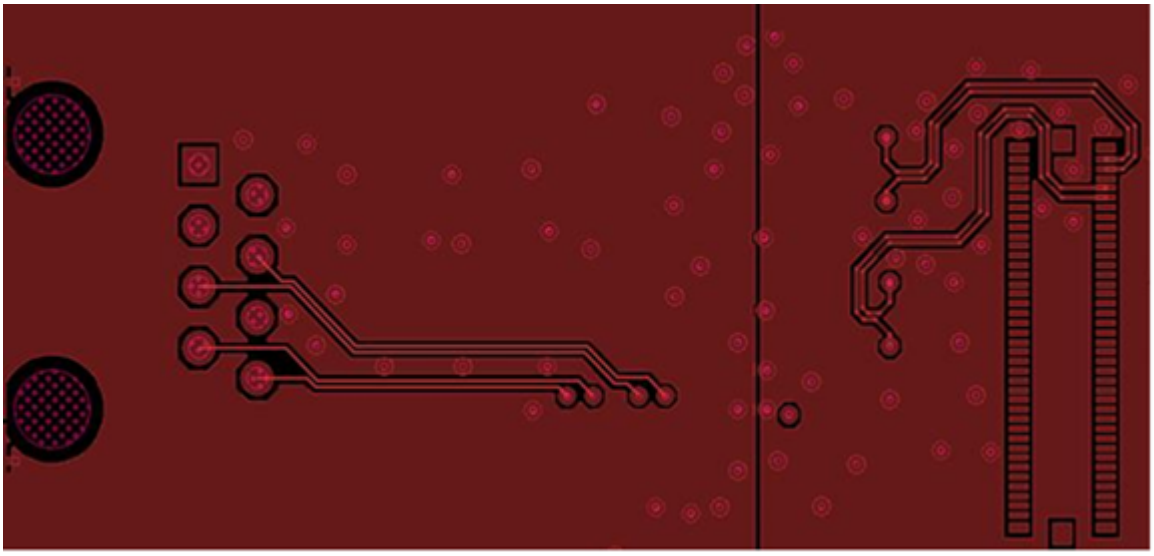

Bottom view

Recommended electrical specifications for the antenna

The receiver has been designed to support a wide variety of GPS antenna elements. GNSS band coverage will be dictated by the bandwidth of the antenna chosen. In addition, the unit is capable of supporting antenna elements with a minimum LNA gain of +31 dB. For optimum performance, the recommended antenna electrical specifications are outlined below:

Feature	Specification
Frequency	1551 to 1614 MHz 1217 to 1257 MHz 1164 to 1214 MHz
VSWR	2.0 max.
Bandwidth	60 MHz
Impedance	50 Ohm
Peak Gain	4 dBic min.
Amplifier Gain	+31 to +41 dB typical ***Note*** *– Required LNA gain does not account for antenna cable insertion loss.*
Noise Figure	1.5 dB typical
Output VSWR	1.5:1 typical
Filtering	-30 dB (+/- 100 MHz)
DC Voltage	+3.3 to +5 V DC ***Note*** *– Antenna LNA bias voltage is supplied directly from pin 3 on the Multi-pin Interface Connector J5. The antenna output is rated to 10 V and can source a maximum of 400 mA.*
DC Current	300 mA max.

CHAPTER 5

Installation

- Unpacking and inspecting the shipment
- Installation guidelines
- Interface board evaluation kit
- Routing and connecting the antenna cable
- LED functionality and operation

Unpacking and inspecting the shipment

Visually inspect the shipping cartons for any signs of damage or mishandling before unpacking the receiver. Immediately report any damage to the shipping carrier.

Shipment carton contents

The shipment will include one or more cartons depending on the number of optional accessories ordered. Open the shipping cartons and make sure that all of the components indicated on the bill of lading are present.

Reporting shipping problems

Report any problems discovered after you unpack the shipping cartons to both Trimble Customer Support and the shipping carrier.

Installation guidelines

The receiver module is shipped in an unsoldered form along with the I/O evaluation board (if ordered). The I/O evaluation board has mounting slots to accommodate the GNSS module. For more information, refer to the drawings of the receiver.

Considering environmental conditions

Install the receiver in a location situated in a dry environment. Avoid exposure to extreme environmental conditions. This includes:

- Water or excessive moisture
- Excessive heat greater than 80 °C (176 °F)
- Excessive cold less than –40 °C (–40 °F)
- Corrosive fluids and gases

Avoiding these conditions improves the receiver's performance and long-term product reliability.

Supported antennas

The receiver tracks multiple GNSS frequencies; the Trimble Zephyr™ II antenna supports these frequencies.

Other antennas may be used with the receiver. However, ensure that the antenna you choose supports the frequencies you need to track.

For the BD930, BD930-UHF, BD935-INS receivers, the minimum required LNA gain is 31.0 dB.

Mounting the antennas

Choosing the correct location for the antenna is critical for a high quality installation. Poor or incorrect placement of the antenna can influence accuracy and reliability and may result in damage during normal operation. Follow these guidelines to select the antenna location:

- If the application is mobile, place the antenna on a flat surface along the centerline of the vehicle.
- Choose an area with clear view to the sky above metallic objects.
- ***Avoid*** areas with high vibration, excessive heat, electrical interference, and strong magnetic fields.
- ***Avoid*** mounting the antenna close to stays, electrical cables, metal masts, and other antennas.
- ***Avoid*** mounting the antenna near transmitting antennas, radar arrays, or satellite communication equipment.

Sources of electrical interference

Avoid the following sources of electrical and magnetic noise:


- Gasoline engines (spark plugs)
- Television and computer monitors
- Alternators and generators
- Electric motors
- Propeller shafts
- Equipment with DC-to-AC converters
- Fluorescent lights
- Switching power supplies

Interface board evaluation kit

An evaluation kit is available for testing the receiver. This includes an I/O board that gives access to the following:

- Power input connector
- Power ON/OFF switch
- Four serial ports through DB9 connectors
- Ethernet through an RJ45 connector
- USB port through USB Type A and B receptacles
- Two pairs (Event and Ground) of pins for Event 1 and 2 respectively.
- One pair of pins (PPS and GND) for the 1 PPS Output
- Three LEDs to indicate satellite tracking, receipt of corrections, and power.

The following figure shows a typical I/O board setup:

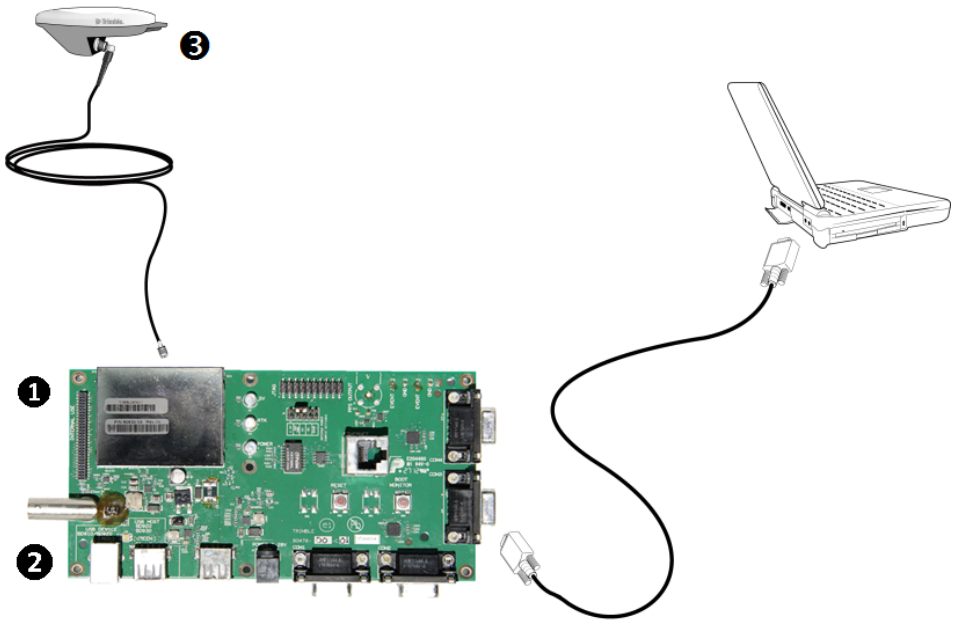

❶ BD930 receiver ❷ I/O board ❸ Zephyr antenna

The computer connection provides a means to set up and configure the receiver.

Routing and connecting the antenna cable

1. After mounting the antenna, route the antenna cable from the GPS antenna to the receiver.

   Avoid the following hazards when routing the antenna cable:

   - Sharp ends or kinks in the cable
   - Hot surfaces (such as exhaust manifolds or stacks)
   - Rotating or reciprocating equipment
   - Sharp or abrasive surfaces
   - Door and window jams
   - Corrosive fluids or gases

2. After routing the cable, connect it to the receiver. Use tie-wraps to secure the cable at several points along the route. For example, to provide strain relief for the antenna cable connection, use a tie-wrap to secure the cable near the base of the antenna.

   Note *– When securing the cable, start at the antenna and work towards the receiver.*

3. When the cable is secured, coil any slack. Secure the coil with a tie-wrap and tuck it in a safe place.

LED functionality and operation

The evaluation interface board comes with three LEDs to indicate satellite tracking, RTK receptions, and power. The initial boot-up sequence for a receiver lights all the three LEDs for about three seconds followed by a brief duration where all three LEDs are off. Thereafter, use the following table to confirm tracking of satellite signals or for basic troubleshooting.

For single antenna configurations, the following LED patterns apply:

Power LED	RTK Corrections LED	SV Tracking LED	Status
On (continuous)	Off	Off	The receiver is turned on, but not tracking satellites.
On (continuous)	Off	Blinking at 1 Hz	The receiver is tracking satellites, but no incoming RTK corrections are being received.
On (continuous)	Blinking at 1 Hz	Blinking at 1 Hz	The receiver is tracking satellites and receiving incoming RTK corrections.
On (continuous)	Off or blinking (receiving corrections)	Blinking at 5 Hz for a short while	Occurs after a power boot sequence when the receiver is tracking less than 5 satellites and searching for more satellites.
On (continuous)	Blinking at 1 Hz	Off	The receiver is receiving incoming RTK corrections, but not tracking satellites.
On (continuous)	Blinking at 5 Hz	Blinking at 1 Hz	The receiver is receiving Moving Base RTK corrections at 5 Hz.
On (continuous)	On (continuous)	Blinking at 1 Hz	The receiver is receiving Moving Base RTK corrections at 10 or 20 Hz (the RTK LED turns off for 100 ms if a correction is lost).
On (continuous)	On, blinking off briefly at 1 Hz	Blinking at 1 Hz	The receiver is in a base station mode, tracking satellites and transmitting RTK corrections.
On (continuous)	Blinking at 1 Hz	On (continuous)	The receiver is in Boot Monitor Mode. Use the WinFlash utility to reload application firmware onto the board. For more information, contact technical support.

Troubleshooting Receiver Issues

This section describes some possible receiver issues, possible causes, and how to solve them. Please read this section before you contact Technical Support.

Issue	Possible cause	Solution
The receiver does not turn on.	External power is too low.	Check that the input voltage is within limits.
The base station receiver is not broadcasting.	Port settings between reference receiver and radio are incorrect.	Check the settings on the radio and the receiver.
	Faulty cable between receiver and radio.	Try a different cable.
		Examine the ports for missing pins.
		Use a multimeter to check pinouts.
	No power to radio.	If the radio has its own power supply, check the charge and connections.
		Examine the ports for missing pins.
		Use a multimeter to check pinouts.
Rover receiver is not receiving radio.	The base station receiver is not broadcasting.	See the issue "The base station receiver is not broadcasting" above.
	Incorrect over air baud rates between reference and rover.	Connect to the rover receiver radio, and make sure that it has the same setting as the reference receiver.
	Incorrect port settings between roving external radio and receiver.	If the radio is receiving data and the receiver is not getting radio communications, check that the port settings are correct.
The receiver is	The GPS antenna cable is	Make sure that the GPS antenna cable is tightly

Issue	Possible cause	Solution
not receiving satellite signals.	loose.	seated in the GPS antenna connection on the GPS antenna.
	The cable is damaged.	Check the cable for any signs of damage. A damaged cable can inhibit signal detection from the antenna at the receiver.
	The GPS antenna is not in clear line of sight to the sky.	Make sure that the GPS antenna is located with a clear view of the sky.
		Restart the receiver as a last resort (turn off and then turn it on again).

Glossary

1PPS	Pulse-per-second. Used in hardware timing. A pulse is generated in conjunction with a time stamp. This defines the instant when the time stamp is applicable.
almanac	A file that contains orbit information on all the satellites, clock corrections, and atmospheric delay parameters. The almanac is transmitted by a GNSS satellite to a GNSS receiver, where it facilitates rapid acquisition of GNSS signals when you start collecting data, or when you have lost track of satellites and are trying to regain GNSS signals. The orbit information is a subset of the ephemeris/ephemerides data.
base station	Also called *reference station*. In construction, a base station is a receiver placed at a known point on a jobsite that tracks the same satellites as an RTK rover, and provides a real-time differential correction message stream through radio to the rover, to obtain centimeter level positions on a continuous real-time basis. A base station can also be a part of a virtual reference station network, or a location at which GNSS observations are collected over a period of time, for subsequent postprocessing to obtain the most accurate position for the location.
BeiDou	The BeiDou Navigation Satellite System (also known as BDS) is a Chinese satellite navigation system. The first BeiDou system (known as BeiDou-1), consists of four satellites and has limited coverage and applications. It has been offering navigation services mainly for customers in China and from neighboring regions since 2000. The second generation of the system (known as BeiDou-2) consists of satellites in a combination of geostationary, inclined geosynchronous, and medium earth orbit configurations. It became operational with coverage of China in December 2011. However, the complete Interface Control Document (which specifies the satellite messages) was not released until December 2012. BeiDou-2 is a regional navigation service which offers services to customers in the Asia-Pacific region. A third generation of the BeiDou system is planned, which will expand coverage globally. This generation is currently scheduled to be completed by 2020.
BINEX	BInary EXchange format. BINEX is an operational binary format standard for GPS/GLONASS/SBAS research purposes. It is designed to grow and allow encapsulation of all (or most) of the information currently allowed for in a range of other formats.

broadcast server	An Internet server that manages authentication and password control for a network of VRS servers, and relays VRS corrections from the VRS server that you select.
carrier	A radio wave having at least one characteristic (such as frequency, amplitude, or phase) that can be varied from a known reference value by modulation.
carrier frequency	The frequency of the unmodulated fundamental output of a radio transmitter. The GPS L1 carrier frequency is 1575.42 MHz.
carrier phase	Is the cumulative phase count of the GPS or GLONASS carrier signal at a given time.
cellular modems	A wireless adapter that connects a laptop computer to a cellular phone system for data transfer. Cellular modems, which contain their own antennas, plug into a PC Card slot or into the USB port of the computer and are available for a variety of wireless data services such as GPRS.
CMR/CMR+	Compact Measurement Record. A real-time message format developed by Trimble for broadcasting corrections to other Trimble receivers. CMR is a more efficient alternative to RTCM.
CMRx	A real-time message format developed by Trimble for transmitting more satellite corrections resulting from more satellite signals, more constellations, and more satellites. Its compactness means more repeaters can be used on a site.
covariance	A statistical measure of the variance of two random variables that are observed or measured in the same mean time period. This measure is equal to the product of the deviations of corresponding values of the two variables from their respective means.
datum	Also called *geodetic datum*. A mathematical model designed to best fit the geoid, defined by the relationship between an ellipsoid and, a point on the topographic surface, established as the origin of the datum. World geodetic datums are typically defined by the size and shape of an ellipsoid and the relationship between the center of the ellipsoid and the center of the earth. Because the earth is not a perfect ellipsoid, any single datum will provide a better model in some locations than in others. Therefore, various datums have been established to suit particular regions. For example, maps in Europe are often based on the European datum of 1950 (ED-50). Maps in the United States are often based on the North American datum of 1927 (NAD-27) or 1983 (NAD-83). All GPS coordinates are based on the WGS-84 datum surface.
deep discharge	Withdrawal of all electrical energy to the end-point voltage before the

	cell or battery is recharged.
DGPS	See real-time differential GPS.
differential correction	Differential correction is the process of correcting GNSS data collected on a rover with data collected simultaneously at a base station. Because the base station is on a known location, any errors in data collected at the base station can be measured, and the necessary corrections applied to the rover data. Differential correction can be done in real-time, or after the data is collected by postprocessing.
differential GPS	See real-time differential GPS.
DOP	Dilution of Precision. A measure of the quality of GNSS positions, based on the geometry of the satellites used to compute the positions. When satellites are widely spaced relative to each other, the DOP value is lower, and position precision is greater. When satellites are close together in the sky, the DOP is higher and GNSS positions may contain a greater level of error. PDOP (Position DOP) indicates the three-dimensional geometry of the satellites. Other DOP values include HDOP(Horizontal DOP) and VDOP (Vertical DOP), which indicate the precision of horizontal measurements (latitude and longitude) and vertical measurements respectively. PDOP is related to HDOP and VDOP as follows: $PDOP^2 = HDOP^2 + VDOP^2$.
dual-frequency GPS	A type of receiver that uses both L1 and L2 signals from GPS satellites. A dual-frequency receiver can compute more precise position fixes over longer distances and under more adverse conditions because it compensates for ionospheric delays.
EGNOS	European Geostationary Navigation Overlay Service. A Satellite-Based Augmentation System (SBAS) that provides a free-to-air differential correction service for GNSS. EGNOS is the European equivalent of WAAS, which is available in the United States.
elevation	The vertical distance from a geoid such as EGM96 to the antenna phase center. The geoid is sometimes referred to as Mean Sea Level.
elevation mask	The angle below which the receiver will not track satellites. Normally set to 10 degrees to avoid interference problems caused by buildings and trees, atmospheric issues, and multipath errors.
ellipsoid	An ellipsoid is the three-dimensional shape that is used as the basis for mathematically modeling the earth's surface. The ellipsoid is defined by the lengths of the minor and major axes. The earth's minor axis is the polar axis and the major axis is the equatorial axis.

EHT	Height above ellipsoid.
ephemeris/ephemerides	A list of predicted (accurate) positions or locations of satellites as a function of time. A set of numerical parameters that can be used to determine a satellite's position. Available as broadcast ephemeris or as postprocessed precise ephemeris.
epoch	The measurement interval of a GNSS receiver. The epoch varies according to the measurement type: for real-time measurement it is set at one second; for postprocessed measurement it can be set to a rate of between one second and one minute. For example, if data is measured every 15 seconds, loading data using 30-second epochs means loading every alternate measurement.
feature	A feature is a physical object or event that has a location in the real world, which you want to collect position and/or descriptive information (attributes) about. Features can be classified as surface or non-surface features, and again as points, lines/break lines, or boundaries/areas.
firmware	The program inside the receiver that controls receiver operations and hardware.
GAGAN	GPS Aided Geo Augmented Navigation. A regional SBAS system currently in development by the Indian government.
Galileo	Galileo is a GNSS system built by the European Union and the European Space Agency. It is complimentary to GPS and GLONASS.
geoid	The geoid is the equipotential surface that would coincide with the mean ocean surface of the Earth. For a small site this can be approximated as an inclined plane above the Ellipsoid.
GHT	Height above geoid.
GIOVE	Galileo In-Orbit Validation Element. The name of each satellite for the European Space Agency to test the Galileo positioning system.
GLONASS	Global Orbiting Navigation Satellite System. GLONASS is a Soviet space-based navigation system comparable to the American GPS system. The operational system consists of 21 operational and 3 non-operational satellites in 3 orbit planes.
GNSS	Global Navigation Satellite System.
GPS	Global Positioning System. GPS is a space-based satellite navigation system consisting of multiple satellites in six orbit planes.
GSOF	General Serial Output Format. A Trimble proprietary message format.
HDOP	Horizontal Dilution of Precision. HDOP is a DOP value that indicates the

	precision of horizontal measurements. Other DOP values include VDOP (vertical DOP) and PDOP (Position DOP). Using a maximum HDOP is ideal for situations where vertical precision is not particularly important, and your position yield would be decreased by the vertical component of the PDOP (for example, if you are collecting data under canopy).
height	The vertical distance above the Ellipsoid. The classic Ellipsoid used in GPS is WGS-84.
IBSS	Internet Base Station Service. This Trimble service makes the setup of an Internet-capable receiver as simple as possible. The base station can be connected to the Internet (cable or wirelessly). To access the distribution server, the user enters a password into the receiver. To use the server, the user must have a Trimble Connected Community site license.
L1	The primary L-band carrier used by GPS and GLONASS satellites to transmit satellite data.
L2	The secondary L-band carrier used by GPS and GLONASS satellites to transmit satellite data.
L2C	A modernized code that allows significantly better ability to track the L2 frequency.
L5	The third L-band carrier used by GPS satellites to transmit satellite data. L5 will provide a higher power level than the other carriers. As a result, acquiring and tracking weak signals will be easier.
Location RTK	Some applications such as vehicular-mounted site supervisor systems do not require Precision RTK accuracy. Location RTK is a mode in which, once initialized, the receiver will operate either in 10 cm horizontal and 10 cm vertical accuracy, or in 10 cm horizontal and 2 cm vertical accuracy.
Mountpoint	Every single NTripSource needs a unique mountpoint on an NTripCaster. Before transmitting GNSS data to the NTripCaster, the NTripServer sends an assignment of the mountpoint.
Moving Base	Moving Base is an RTK positioning technique in which both reference and rover receivers are mobile. Corrections are sent from a “base” receiver to a “rover” receiver and the resultant baseline (vector) has centimeter-level accuracy.
MSAS	MTSAT Satellite-Based Augmentation System. A Satellite-Based Augmentation System (SBAS) that provides a free-to-air differential correction service for GNSS. MSAS is the Japanese equivalent of WAAS, which is available in the United States.

multipath	Interference, similar to ghosts on an analog television screen that occurs when GNSS signals arrive at an antenna having traversed different paths. The signal traversing the longer path yields a larger pseudorange estimate and increases the error. Multiple paths can arise from reflections off the ground or off structures near the antenna.
NMEA	National Marine Electronics Association. NMEA 0183 defines the standard for interfacing marine electronic navigational devices. This standard defines a number of 'strings' referred to as NMEA strings that contain navigational details such as positions. Most Trimble GNSS receivers can output positions as NMEA strings.
NTrip Protocol	Networked Transport of RTCM via Internet Protocol (NTrip) is an application-level protocol that supports streaming Global Navigation Satellite System (GNSS) data over the Internet. NTrip is a generic, stateless protocol based on the Hypertext Transfer Protocol (HTTP). The HTTP objects are extended to GNSS data streams.
NTripCaster	The NTripCaster is basically an HTTP server supporting a subset of HTTP request/response messages and adjusted to low-bandwidth streaming data. The NTripCaster accepts request messages on a single port from either the NTripServer or the NTripClient. Depending on these messages, the NTripCaster decides whether there is streaming data to receive or to send. Trimble NTripCaster integrates the NTripServer and the NTripCaster. This port is used only to accept requests from NTripClients.
NTripClient	An NTripClient will be accepted by and receive data from an NTripCaster, if the NTripClient sends the correct request message (TCP/UDP connection to the specified NTripCaster IP and listening port).
NTripServer	The NTripServer is used to transfer GNSS data of an NTripSource to the NTripCaster. An NTripServer in its simplest setup is a computer program running on a PC that sends correction data of an NTripSource (for example, as received through the serial communication port from a GNSS receiver) to the NTripCaster. The NTripServer - NTripCaster communication extends HTTP by additional message formats and status codes.
NTripSource	The NTripSources provide continuous GNSS data (for example, RTCM-104 corrections) as streaming data. A single source represents GNSS data referring to a specific location. Source description parameters are compiled in the source-table.
OmniSTAR	The OmniSTAR HP/XP service allows the use of new generation dual-frequency receivers with the OmniSTAR service. The HP/XP service

	does not rely on local reference stations for its signal, but utilizes a global satellite monitoring network. Additionally, while most current dual-frequency GNSS systems are accurate to within a meter or so, OmniSTAR with XP is accurate in 3D to better than 30 cm.
Orthometric elevation	The Orthometric Elevation is the height above the geoid (often termed the height above the 'Mean Sea Level').
PDOP	Position Dilution of Precision. PDOP is a DOP value that indicates the precision of three-dimensional measurements. Other DOP values include VDOP (vertical DOP) and HDOP (Horizontal Dilution of Precision). Using a maximum PDOP value is ideal for situations where both vertical and horizontal precision are important.
postprocessing	Postprocessing is the processing of satellite data after it is collected, in order to eliminate error. This involves using computer software to compare data from the rover with data collected at the base station.
QZSS	Quasi-Zenith Satellite System. A Japanese regional GNSS, eventually consisting of three geosynchronous satellites over Japan.
real-time differential GPS	Also known as *real-time differential correction* or *DGPS*. Real-time differential GPS is the process of correcting GPS data as you collect it. Corrections are calculated at a base station and then sent to the receiver through a radio link. As the rover receives the position it applies the corrections to give you a very accurate position in the field. Most real-time differential correction methods apply corrections to code phase positions. While DGPS is a generic term, its common interpretation is that it entails the use of single-frequency code phase data sent from a GNSS base station to a rover GNSS receiver to provide submeter position accuracy. The rover receiver can be at a long range (greater than 100 kms (62 miles)) from the base station.
rover	A rover is any mobile GNSS receiver that is used to collect or update data in the field, typically at an unknown location.
Roving mode	Roving mode applies to the use of a rover receiver to collect data, stakeout, or control machinery in real time using RTK techniques.
RTCM	Radio Technical Commission for Maritime Services. A commission established to define a differential data link for the real-time differential correction of roving GNSS receivers. There are three versions of RTCM correction messages. All Trimble GNSS receivers use Version 2 protocol for single-frequency DGPS type corrections. Carrier phase corrections are available on Version 2, or on the newer Version 3 RTCM protocol, which is available on certain Trimble dual-frequency receivers. The

	Version 3 RTCM protocol is more compact but is not as widely supported as Version 2.
RTK	Real-time kinematic. A real-time differential GPS method that uses carrier phase measurements for greater accuracy.
SBAS	Satellite-Based Augmentation System. SBAS is based on differential GPS, but applies to wide area (WAAS/EGNOS/MSAS) networks of reference stations. Corrections and additional information are broadcast using geostationary satellites.
sCMRx	Scrambled CMRx. CMRx is a new Trimble message format that offers much higher data compression than Trimble's CMR/CMR+ formats.
signal-to-noise ratio	SNR. The signal strength of a satellite is a measure of the information content of the signal, relative to the signal's noise. The typical SNR of a satellite at 30° elevation is between 47 and 50 dB-Hz.
skyplot	The satellite skyplot confirms reception of a differentially corrected GNSS signal and displays the number of satellites tracked by the GNSS receiver, as well as their relative positions.
SNR	See signal-to-noise ratio.
Source-table	The NTripCaster maintains a source-table containing information on available NTripSources, networks of NTripSources, and NTripCasters, to be sent to an NTripClient on request. Source-table records are dedicated to one of the following: • data STReams (record type STR) • CASters (record type CAS) • NETworks of data streams (record type NET) All NTripClients must be able to decode record type STR. Decoding types CAS and NET is an optional feature. All data fields in the source-table records are separated using the semicolon character.
triple frequency GPS	A type of receiver that uses three carrier phase measurements (L1, L2, and L5).
UTC	Universal Time Coordinated. A time standard based on local solar mean time at the Greenwich meridian.
xFill	Trimble xFill™ is a new service that extends RTK positioning for several minutes when the RTK correction stream is temporarily unavailable. The Trimble xFill service improves field productivity by reducing downtime waiting to re-establish RTK corrections in black spots. It can even expand productivity by allowing short excursions into valleys and other locations where continuous correction messages were not

	previously possible. Proprietary Trimble xFill corrections are broadcast by satellite and are generally available on construction sites globally where the GNSS constellations are also visible. It applies to any positioning task being performed with a single-base, Trimble Internet Base Station Service (IBSS), or VRS™ RTK correction source.
variance	A statistical measure used to describe the spread of a variable in the mean time period. This measure is equal to the square of the deviation of a corresponding measured variable from its mean. See also covariance.
VDOP	Vertical Dilution of Precision. VDOP is a DOP value (dimensionless number) that indicates the quality of GNSS observations in the vertical frame.
VRS	Virtual Reference Station. A VRS system consists of GNSS hardware, software, and communication links. It uses data from a network of base stations to provide corrections to each rover that are more accurate than corrections from a single base station. To start using VRS corrections, the rover sends its position to the VRS server. The VRS server uses the base station data to model systematic errors (such as ionospheric noise) at the rover position. It then sends RTCM correction messages back to the rover.
WAAS	Wide Area Augmentation System. WAAS was established by the Federal Aviation Administration (FAA) for flight and approach navigation for civil aviation. WAAS improves the accuracy and availability of the basic GNSS signals over its coverage area, which includes the continental United States and outlying parts of Canada and Mexico. The WAAS system provides correction data for visible satellites. Corrections are computed from ground station observations and then uploaded to two geostationary satellites. This data is then broadcast on the L1 frequency, and is tracked using a channel on the GNSS receiver, exactly like a GNSS satellite. Use WAAS when other correction sources are unavailable, to obtain greater accuracy than autonomous positions. For more information on WAAS, refer to the FAA website at http://gps.faa.gov. The EGNOS service is the European equivalent and MSAS is the Japanese equivalent of WAAS.
WGS-84	World Geodetic System 1984. Since January 1987, WGS-84 has superseded WGS-72 as the datum used by GPS. The WGS-84 datum is based on the ellipsoid of the same name.